

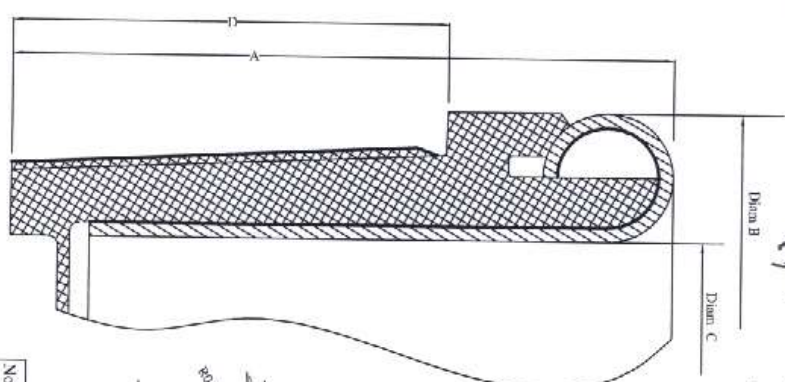
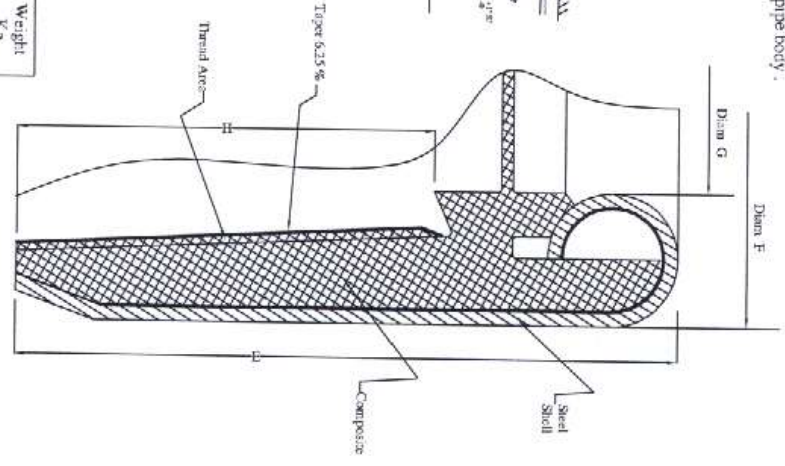


REV. A 1/25
 APPROV. CA



- Note:
- Steel shell (WT: 2.0 - 2.5 mm) for impact resistance & shape retention.
- Precision moulded threads conform to the tubular's thread & seal profile with tolerance for thread compound. Tough & chemically inert composite (Polyethylene type, Red colour, will not react with thread compounds & solvents.)
- Closed End (with a vent hole \varnothing 10 mm) protector with a deep recess provide ample room for lifting hooks & composite barrier keeps dirt & moisture out of the inside of the pipe body.
- All material requirements shall be according to ISO 11960(CAP/ SCT)



Taper 6.25 % - 5 Threads per inch - Rev.(01)

Nominal size	A mm	Diam B mm	Diam C mm	D mm	E mm	Diam F mm	Diam G mm	H mm	Weight Kg
9 5/8"	165	270	222	130	185	265	225	142	Box 6.11 Pin 4.12
13 3/8"	176	365	316	132	185	362	320	142	Box 8.25 Pin 6.24

PIN Protector

BOX Protector